

Name of Driver		Date	Track		Engine	Plug	Muffler	
			Condition:					
Spur Gear	Clutch Bell	Clutch Spring		Clutch Shoe	Tire	Tire Insert	Wheel	Body
46 T	<input type="checkbox"/> Std. <input checked="" type="checkbox"/> LW 13 T	<input type="checkbox"/> 0.90 <input checked="" type="checkbox"/> 1.00 <input type="checkbox"/> 0.95 <input type="checkbox"/> 1.10	Carbon <input checked="" type="checkbox"/> x Aluminum <input checked="" type="checkbox"/> 3	Tire : _____ Compounds: _____			KYOSHO	

### ● Diff. Gear Set-Up


	Front	Center	Rear
Diff. Gear	<input checked="" type="checkbox"/> Std. <input type="checkbox"/> LSD	<input checked="" type="checkbox"/> Std. <input type="checkbox"/> LSD	<input checked="" type="checkbox"/> Std. <input type="checkbox"/> LSD
	Ring Gear <input checked="" type="checkbox"/> 43/13 <input type="checkbox"/> 42/12	# 5000	Ring Gear <input checked="" type="checkbox"/> 43/13 <input type="checkbox"/> 42/12
	# 5000	# 3000	

### ● Shock Set-Up

	Front	Rear
Shock Type	P : w/Diaphragm A : Aeration	Size - type
Shock Piston	B : Black W : White T : Taper	φ 1.3 x 8
Shock Oil	# 650	# 500
Shock Spring	Gray	Light Blue

### ● Ride Height

Front	Rear
mm	mm

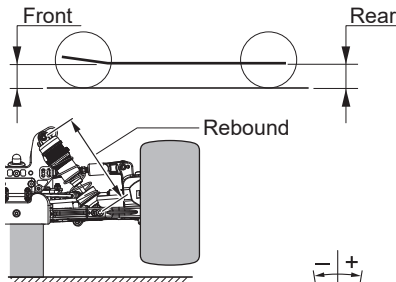

### ● Rebound

Front	Rear
102 mm	118 mm

### ● Camber Angle

Front	Rear
+ °	+ °
- °	- °

+ Positive Camber  
- Negative Camber

### ● Toe Angle

Front	Rear
+ °	<input type="checkbox"/> 2.5° <input checked="" type="checkbox"/> 3° <input type="checkbox"/> 3.5°
- °	


< Front >

### ● Wheelbase

Collar of Rear Hub	Front Side 5 mm
	Rear Side 0 mm

31 mm


### ● Shock Mount Position



Rear Upper Shock Bush  
 Std.  Long

Sus. Arm  
Front  In  Out  
Rear  In  Out

### ● Rear Upper Arm Position



Plastic  
 Aluminum

Hub Carrier Bush  
 Plastic  
 Brass

### ● Rear Wheel Hub

Narrow  Std.  Wide


### ● Front Sus. Arm

Soft (Std.)  Hard

### ● Front Sus. Bush

Rear Side

### ● Front Upper Arm Position




### ● Front Wheel Hub

Narrow  Std.  Wide

### ● Front Hub Carrier

Plastic  Aluminum  
 13°  16°  17.5°  19°



### ● Lower Bush

Plastic  Brass

-1°  0°  +1°

### ● Rear Sus. Bush

Front Side	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>
Rear Side	<input type="checkbox"/> (2.5) (2.5) <input checked="" type="checkbox"/> (3) (3) <input type="checkbox"/> (3.5) (3.5) <input type="checkbox"/> (2) (2) <input type="checkbox"/> (3) (3) <input type="checkbox"/> (3) (3)

### ● Rear Sus. Arm

Soft (Std.)  Hard


Rear Sus. Bush

Short  Medium  Long


### ● Servo Horn

Steering	Throttle
<input type="checkbox"/> Plastic	<input type="checkbox"/> Plastic
<input type="checkbox"/> AL. Long	<input type="checkbox"/> AL.
<input type="checkbox"/> AL. Short	

### ● Steering Plate



### ● Sway Bar



Front	Rear
φ 2.3	φ 2.5
0 mm	0 mm

### ● Weight

Front	Rear
<input type="checkbox"/> None	<input type="checkbox"/> None
<input type="checkbox"/> IFW604-10	<input type="checkbox"/> IFW605-10
<input type="checkbox"/> IFW604-20	<input type="checkbox"/> IFW605-20
<input type="checkbox"/> other	<input type="checkbox"/> other

### ● Wing

<input checked="" type="checkbox"/> IF491(TK14)	Flap <input type="checkbox"/> None
	<input type="checkbox"/> 5mm
	<input type="checkbox"/> 8mm
	<input type="checkbox"/> Holes

memo: