



# EVOLVA

## 2003 SETTING DATA SHEET Ver1.00

NAME	Takasi Miyashita	TEMP	20 °C	ENGINE	Sirio	MUFFLER	Sirio 2013
DATE	2003/11/09	HUMIDITY	60 %	HEAD CLEARANCE	mm	FUEL TYPE	Tornado 30%
TRACK	BOSS SPEED JRCC Final	TRACTION	70 %	PLUG No.	Sirio S7 Cold	RADIO	Sanwa - M8

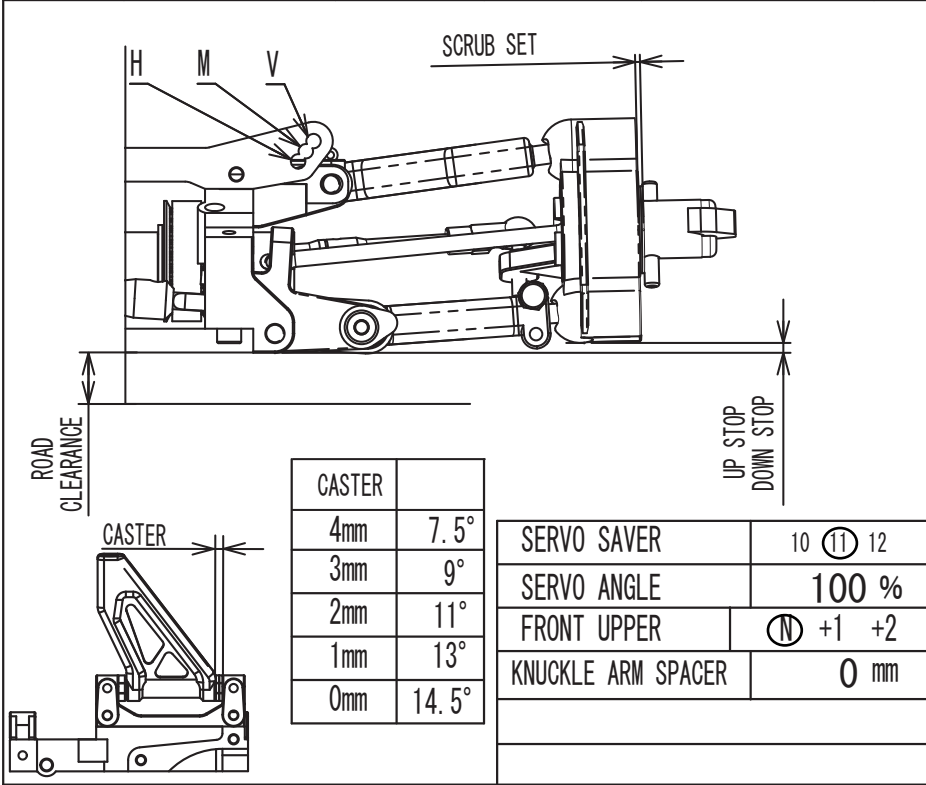

SHOCK OIL	400 450 500 550 600 700 800
DIAPHRAGM	Soft (W6007)
SHOCK PISTON	N Φ1.2-1Hole
SPRING	1.8 2.0 1.9-40 Black
SPRING ADJUSTER	mm
SHOCK POS	H M V
SCRUB SET	0.5
CASTER ANGLE	2 mm
CAMBER ANGLE	L 0 0.5 1.5 2 2.5 3 R 0 0.5 1.5 2 2.5 3
TOE ANGLE	Out 1.5°
FRONT WIDTH	251 mm
UP STOP	- mm
DOWN STOP	+1.0 mm
ANTIROLL BAR	● ○ ○ ○ ○
TIRE HARDNESS	32 35 37 40
TIRE TYPE	STANDARD / MULTI
TIRE DIAMETER	φ 67 mm
ROAD CLEARANCE	7.5 mm

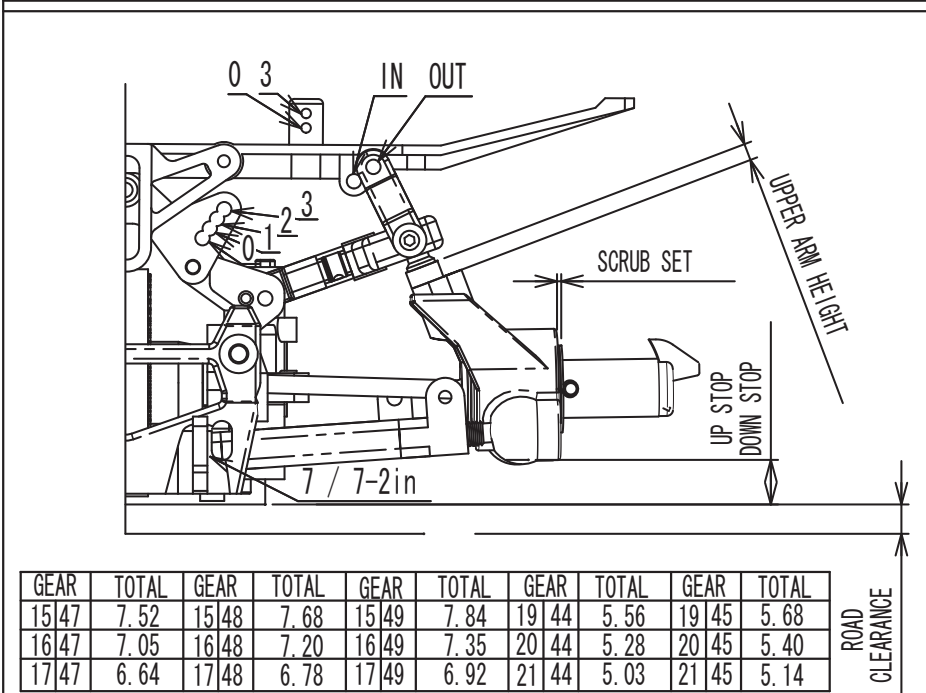

SHOCK OIL	400 450 500 550 600 700 800
DIAPHRAGM	Soft (W6007)+ORing x 3
SHOCK PISTON	N Φ1.2 x 1Hole
SPRING	1.8 2.0 1.9-4.5 Copper
SPRING ADJUSTER	mm
SHOCK POS	0 1 2 3
SCRUB SET	0.5 1.0 1.5 2.0
UPPER ARM	5 mm IN/OUT
CAMBER ANGLE	L 0.5 1 1.5 2 2.5 3 3.5 R 0.5 1 1.5 2 2.5 3 3.5
TOE ANGLE	One side 1.5°
REAR WIDTH	262.5 mm
UP STOP	- mm
DOWN STOP	+9.0 mm
ANTIROLL BAR	φ3 / Ø(30°)
TIRE HARDNESS	32 35 37 40
TIRE TYPE	STANDARD / MULTI
TIRE DIAMETER	φ 74 mm
ROAD CLEARANCE	8 mm
SUS HOLDER	7 / 7-2in
BODY	KYOSHO LOLA (Light)
BODY POSITION	8 mm
REAR SPOILER	7 mm

CLUCH TYPE	3D 4D	PINION GEAR	0.8M 20/25
CLUCH SHOE	N RED GREY	SPUR GEAR	0.8M 61/56
HUGAL SHOE	N φ3.5 Hole	DRIVE RATIO	1mm Difference 26/18 (420 BELT)
CLUCH SPRING	4D	BODY MOUNT POS	IN / OUT
CLEARANCE	0.5 mm	BODY MOUNT HEIGHT	0 / 3
ADJ. NUT	1 mm		

MEMO